






- Supports ARP, ICMP, TCP, UDP, IP, DHCP, HTTP, Modbus/TCP, and 10Base-T Ethernet standard
- Supports Web Based interface for fast configuration
- Supports Modbus/TCP for easy integration with HMI/SCADA or OPC server
- Supports Winsock networking and optional “Virtual serial ports” driver for windows application program
- 8 differential input channels with 16bits A/D converter with optical isolation
- Two models available for Voltage: 0~10V/1~5V or Current: 0~20mA/4~20mA

**Sensor Connection**

(1). 4~20mA, 0~20mA

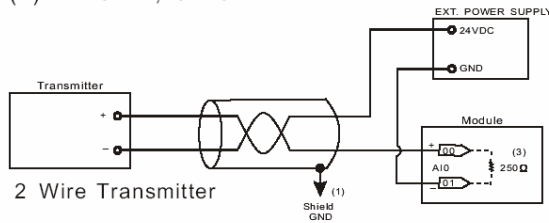

(3). Temp Resgister

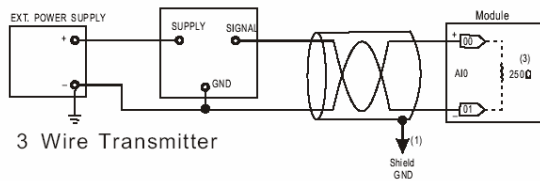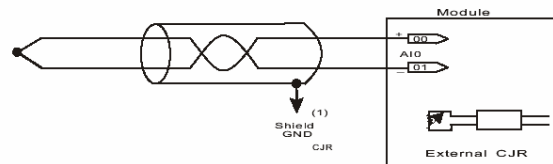

(4). Thermal Resgister

